




## Single Buck Press with Sleeve Pleaters

Model 822SBSP

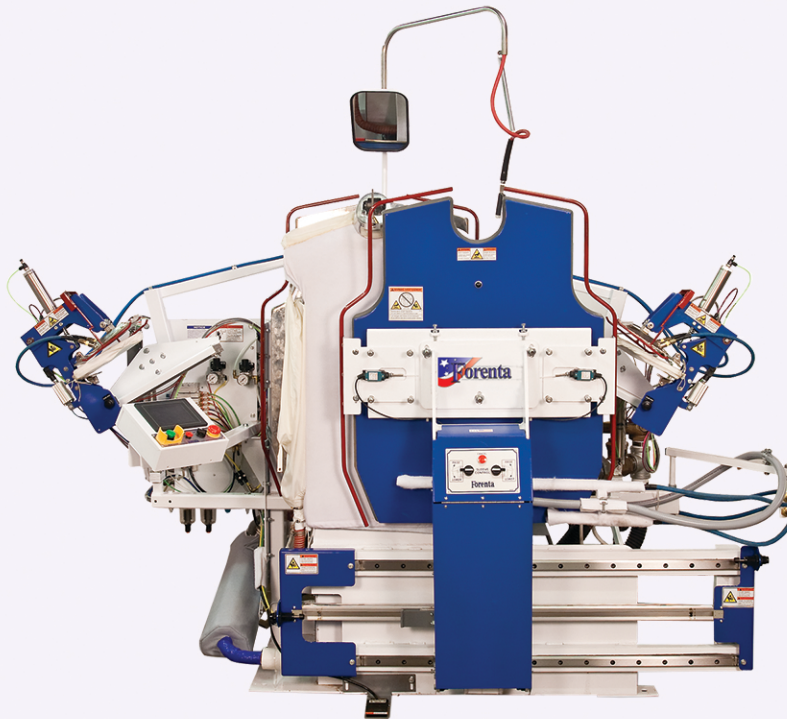

- Production rate indicator
- Easily adjustable time cycles
- Color touch screen control panel
- Water spray and mirror standard
- Self-diagnostics from touch screen
- Super-heated air finishes yoke and sides
- Blower automatically turns off when not in use
- Designed to finish wide range of sizes and styles
- Sleeve pleaters turn on or off with touch screen
- Flat heads for better finish; vacuum buck for smooth fronts
- Stationary buck - shirt is completely dressed from one position
- Multi-position sleeve height adjustment with auto angle orientation

[www.forentausa.com](http://www.forentausa.com)

Tel: 423-586-5370 • Email: [info@forentausa.com](mailto:info@forentausa.com)



Made in USA

# Specifications

## Model 822SSBSP


Electrical connections	822SSBSP
208-240V 3PH 50/60Hz 30.8-29.8 Amps 5.5kW	standard
380-415 / 460V 3PH 50/60Hz 18.5-18.1 / 17.7 Amps 5.5 kW	optional
380-415 / 460V 3PH 50/60Hz 20.7 Amps 5.5 kW, with/240V Neutral wire	optional
<b>Steam and air connections</b>	
Steam inlet	NPT 1/2"
Steam outlet (total of 4 outlets)	NPT 1/2"
Recommended steam pressure	PSIG 115-125 KPa 793-862
Steam consumption @ 125 psig (862 kPa)	lb/hr 86 kg/hr 39 BHP 2.5
Compressed air	NPT 3/8"
Air consumption/shirt	free air/cycle @ 85 psig free air/cycle @ 586 kPa
Recommended air pressure	PSIG 85 KPa 586
Water connection (for water spray)	NPT 1/4"
<b>Weight (crated)</b>	lbs 1690 kg 767
Shipping	

- 1 Steam connection
- 2 Steam outlets
- 3 Control panel
- 4 Air connection
- 5 Electrical connection
- 6 Water connection (For water spray)



### BODY BUCK DIMENSIONS


### TOP VIEW

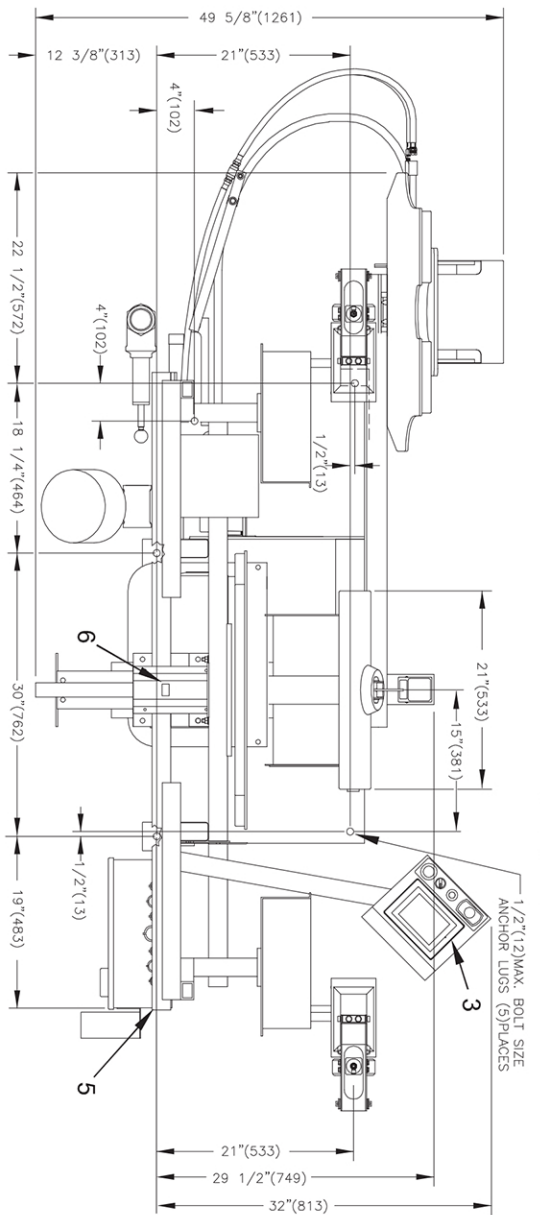

### Detail Line Drawing

(millimeters shown in parentheses)

1/2"(12) MAX. BOLT SIZE  
ANCHOR LUGS (5) PLACES

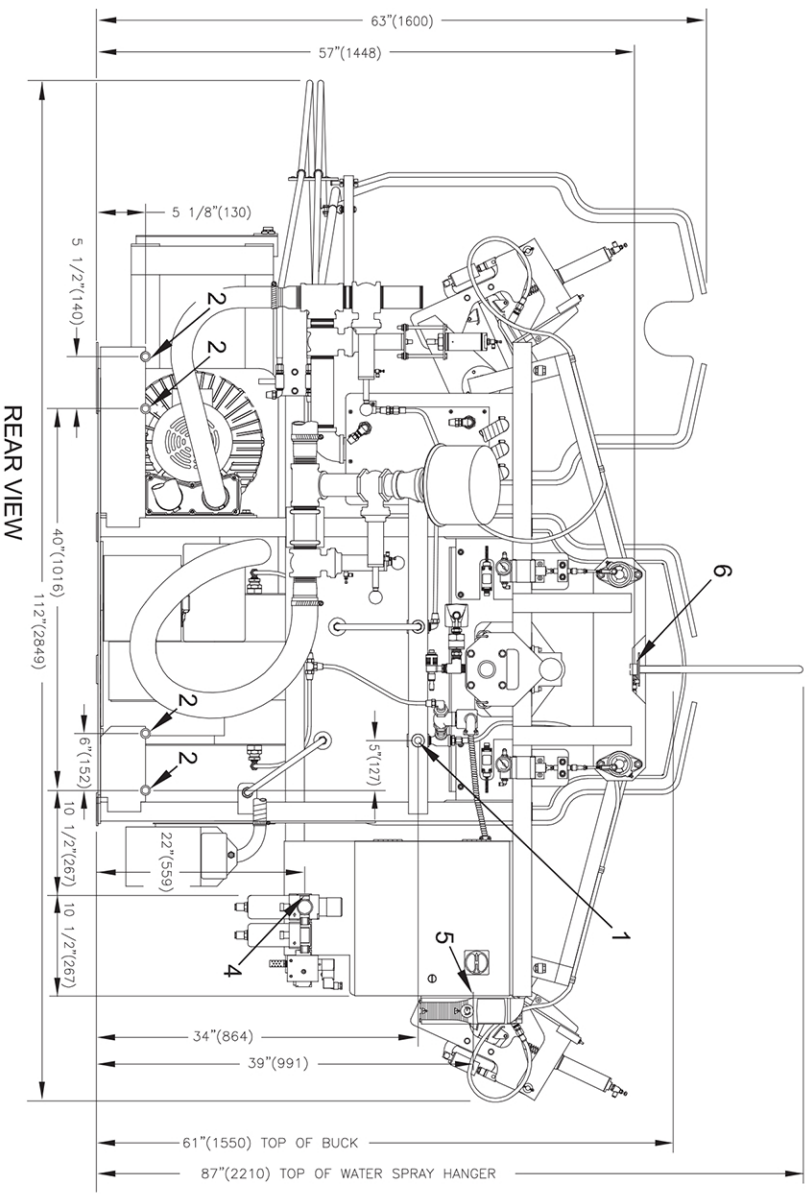

### REAR VIEW